



B-150 SYSTEM COMPACT - COAXIAL

Australian Monitor

DESCRIPTION

THE AM B-150 LOUDSPEAKER IS A FULL RANGE UTILITY UNIT, BASED ON A HIGH POWERED DUAL CONCENTRIC, 200MM DRIVER.

THE DRIVER IS MOUNTED IN AN OPTIMALLY DAMPED SEALED ENCLOSURE WITH VERY COMPACT DIMENSIONS.

AVAILABLE IN TRAPEZOIDAL TYPE ENCLOSURE WITH SATIN BLACK EPOXY FINISH, OR A RECTANGULAR ENCLOSURE, WITH A WOODGRAIN FINISH.

THE SIZE AND SHAPE OF THE LOUDSPEAKER ALLOWS ULTIMATE FLEXIBILITY IN LOCATION FOR DIFFICULT INSTALLATIONS.

THE SYSTEM IS SUITABLE FOR SMALL PUBLIC ADDRESS AND FOR PLAYBACK SYSTEMS IN ENTERTAINMENT VENUES.

THE CONTROLLED DISPERSION PATTERN (POINT-SOURCE) GIVES A HIGH INTELLIGIBILITY IN PROBLEM AREAS SUCH AS HIGH REVERBERATION.

SPECIFICATIONS

FREQUENCY RESPONSE..56Hz - 19Khz (+/- 3db)

BASS ALIGNMENT..2nd order bessell(sealed)

POWER HANDLING.....160 Watts programme.

...80 Watts RMS sine wave.

SENSITIVITY.....90db/Watt metre.

DISPERSION ANGLE.....120 X 120 degrees.

NOMINAL IMPEDANCE..... 8 ohms.

WEIGHT..... 5.2Kgs.

MOUNTING.....4 X captive 6mm T-nuts.


COLOUR.....B-150 T Satin Black Epoxy.

..B-150 R.....Wood Grain.

Height x width x depth

DIMENSIONS .B-150 T 352mm x 320mm x 275mm

.B-150 R 352mm x 290mm x 245mm

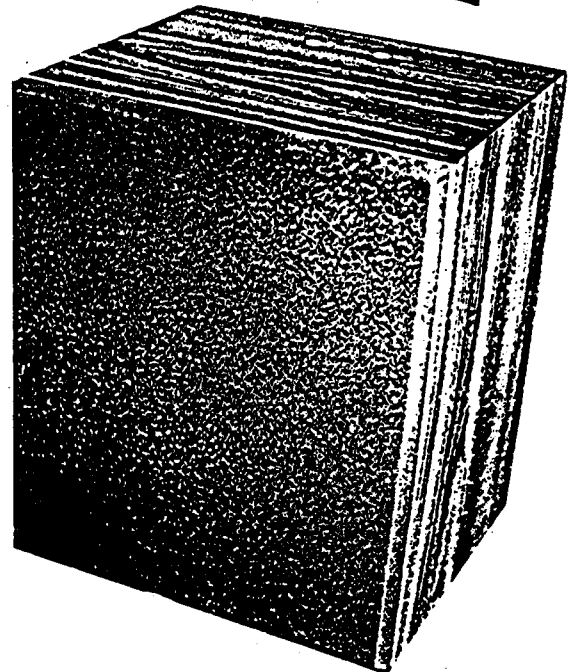

Australian Monitor

53 College street, Gladesville 2111 N.S.W. Australia

Phone (02) 816-3544 International +61-2-816-3544

Fax (02) 817-4303 International +61-2-817-4303