

B-200 S SUPER-WOOFER

Australian Monitor

DESCRIPTION

THE B200 S IS A COMPACT "SUPER-WOOFER" SYSTEM FOR USE IN CONFINED SPACES, OR WHERE A MODULAR APPROACH TO THE LOUDSPEAKER SYSTEM INSTALLATION IS DESIRABLE.


THE SYSTEM UTILIZES AN ADVANCED FORM OF SPEAKER LOADING, ENABLING BASS FREQUENCIES TO BE REPRODUCED WITH LOWER DISTORTION AND HIGHER POWER HANDLING THAN COMPARABLE SIZED VENTED AND SEALED SYSTEMS.

THE POWER RESPONSE CURVE EXHIBITS 12db PER OCTAVE ROLL-ON AND ROLL-OFF.

THIS EFFECTIVELY MEANS THERE IS NO REQUIREMENT FOR A CROSS-OVER NETWORK WHEN USED IN PARRALLEL WITH A MID/HIGH LOUDSPEAKER SYSTEM.

A SIMPLE SERIES INDUCTOR IS INCLUDED IN THE LOUDSPEAKER TO MAINTAIN A CORRECT AMPLIFIER LOAD WHEN USED IN PARRALLEL WITH ANOTHER LOUDSPEAKER.

THE ACOUSTIC OUTPUT FROM THE LOUDSPEAKER IS VIA A CIRCULAR DUCT WHICH ENABLES THE SYSTEM TO OPERATE THROUGH A SMALL APERTURE - IMPORTANT FOR FIXED INSTALLATIONS WHERE THE ENCLOSURES NEED TO BE CONCEALED.

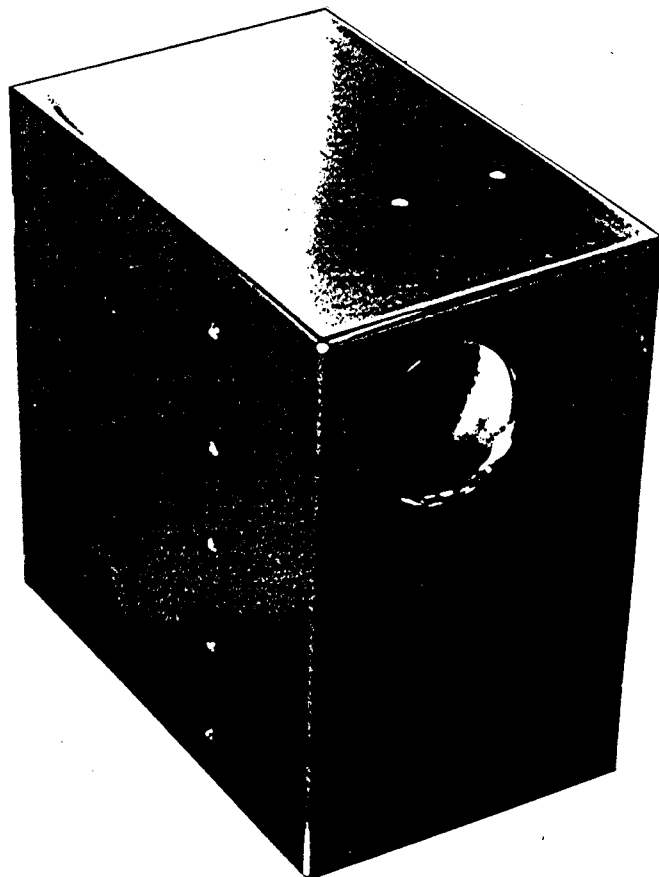

SPECIFICATIONS

FREQUENCY RESPONSE.....	48Hz - 120Hz
SENSITIVITY.....	95db/Watt metre
NOMINAL IMPEDANCE... (Ohms)..	8+8 - STEREO MODE..... 4 - MONO MODE
MAXIMUM POWER INPUT.....	200 Watts MONO MODE
DIMENSIONS.....	400mm X 250mm X 400mm
WEIGHT.....	8Kgs
INPUT / OUTPUT CONNECTIONS.....	4 X XLR'S

In keeping with our policy of continually improving the technical quality of our products, we reserve the right to change component types, manufacturers, sources of supply or technical specifications at time without notice.



Australian Monitor

53 College street, Gladesville 2111 N.S.W. Australia
Phone (02) 816-3544 International +61-2-816-3544
Fax (02) 817-4303 International +61-2-817-4303