

## Features:

- Active low frequency speaker with one 15" woofer.
- Cabinet is made from polypropylene and special high-tech material in large injection mold. It's durable, anti-shock and has good damping characters.
- Voice coil in the 15" woofer is made from Ø75mm copper cladding aluminium ribbon wire. Its efficiency is 20% higher than normal round wires.
- Heavy duty protective grille.



## Model: XR15SUBP

### Technical Specifications

System:	Active low frequency speaker
Cabinet material:	Polypropylene, Trapezoid
Cabinet Colors:	Black, White, Blue, Gray
Drive Quantity:	1x15" (Bass)
High Cut Adjustable:	80Hz-250Hz
Max Sound Level(dB/1M):	120dB
Output Power:	400W
Distortion:	0.02%
Load Impedance:	4 Ohm
Input Impedance:	20 KOhm
Connectors:	XLR K3P
Power Supply:	AC 115V/230V, 50/60Hz
Dimensions(WxDxH mm/pcs):	485x460x700mm
Packing Dimensions(WxDxH mm/pcs)	545x515x800mm
Net Weight(Kg/pcs):	30.5Kg
Gross Weight(Kg/pcs):	33.7Kg

[www.australianmonitor.com.au](http://www.australianmonitor.com.au)

Distributed by Audio Telex Communications Pty Ltd

EUROPE/ASIA/MIDDLE EAST

Phone: 61 2 9647 1411

Email: [international@audiotelx.com.au](mailto:international@audiotelx.com.au)

SYDNEY (NSW & ACT SALES)

Phone: (02) 9647 1411

Email: [nsw@audiotelx.com.au](mailto:nsw@audiotelx.com.au)

ADELAIDE (SA & NT SALES)

Phone: (08) 8352 4444

Email: [sa@audiotelx.com.au](mailto:sa@audiotelx.com.au)

MELBOURNE (VIC & TAS SALES)

Phone: (03) 9890 7477

Email: [vic@audiotelx.com.au](mailto:vic@audiotelx.com.au)

PERTH (WA SALES)

Phone: (08) 9228 4222

Email: [wa@audiotelx.com.au](mailto:wa@audiotelx.com.au)

BRISBANE (QLD SALES)

Phone: (07) 3852 1312

Email: [qld@audiotelx.com.au](mailto:qld@audiotelx.com.au)

AUCKLAND (NZ SALES)


Phone: (09) 415 9426

Email: [sales@audiotelx.co.nz](mailto:sales@audiotelx.co.nz)

[www.audiotelx.com.au](http://www.audiotelx.com.au)

ABN 78001345482 Incorporated in NSW

CE XR15SUBP

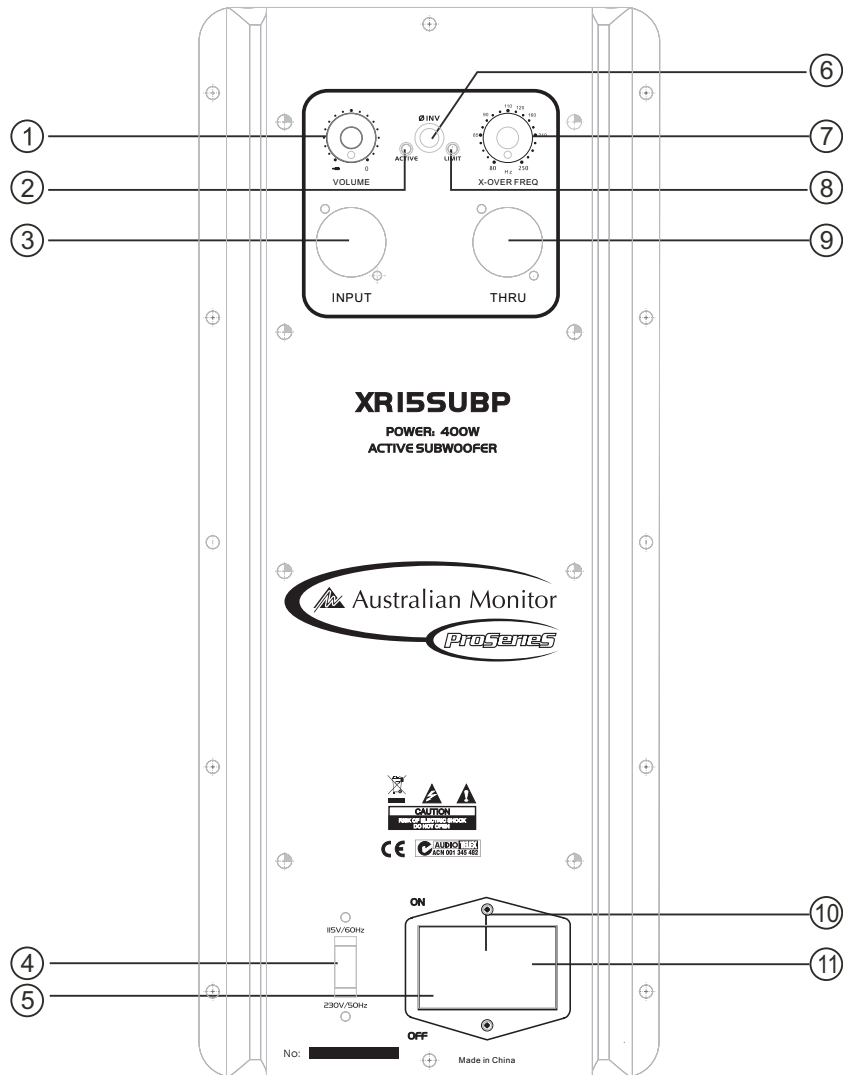

- |   |  |
|---|--|
| <ol style="list-style-type: none"> <li>1. Volume control.</li> <li>2. Active indicator.</li> <li>3. Line/microphone input.</li> <li>4. 115V/230V voltage input selector.<br/>Make sure that the voltage selector is set for your country's correct voltage.</li> <li>5. Power ON/OFF switch.</li> </ol> | <ol style="list-style-type: none"> <li>6. Phase inverting switch.</li> <li>7. High cut. (80Hz-250Hz adjustable)</li> <li>8. Limit indicator.</li> <li>9. Line/microphone output.<br/>(Direct connection to input)</li> <li>10. Protection fuse. Use only fuses of a 5 Amp rating.</li> <li>11. Power supply input. Make sure that the voltage selector is set for your country's correct voltage.</li> </ol> |
|---|--|