

Australian Monitor
SLAM BOX

BAND-PASS PERFECTION

DESIGN SPECIFICATIONS


Where to design a speaker enclosure which had the high sensitivity and characteristics of a "W bin" and the sound quality of a front-loaded speaker, yet keeping the physical size of it as compact as possible without compromising durability or sonic performance.

To do this we incorporated double Band-Pass technology, which utilises 2 x 15" drivers loaded for maximum efficiency through-out the low frequency range and includes a massive 137dB Sound Pressure Level with rated input.

If one requires good tight sound pressure for bass reproduction, then the SLAM BOX is just what you've been waiting for.

Contact your nearest dealer for a demo.

TECHNICAL SPECIFICATIONS	HARDWARE
Continuous Power Handling, Unclipped: 400W Short Term Power Handling, Unclipped: 800W Usable Frequency Response: 40Hz - 250Hz Recommended Cross-over Range: 150Hz - 250Hz Sensitivity: 106.5dB @ 1W/1M Maximum Short Term SPL @ rated input: 137dB Nominal Impedance: 4 Ohms	Input Connections: Dual Parallel male XLR in a recessed plate Enclosure: Sturdy 17mm Plywood covered in black carpet, fitted with heavy duty steel bar handles at each end, powder coated steel grille and 4 x 4" easy wheel in castors. Dimensions: L 1084mm, B 540mm, D 700mm Weight: 75kgs

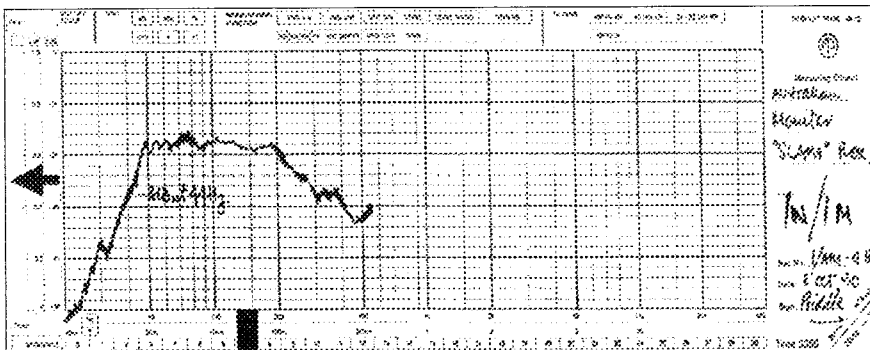

Australian Monitor Pty Limited