

## Features:

- Two-way active speaker with one 12" woofer and one 2" driver.
- Cabinet is made from polypropylene and special high-tech material. It's durable, anti-shock and has good damping characters.
- Voice coil in the 12" woofer is made from Ø75mm copper cladding aluminium ribbon wire.
- Heavy duty protective grille.
- Rotatable 50-100°x55° (HxV) dispersion horn makes it suitable for any performance purposes.
- Molded-in pole mount, easily suspended.
- Vertical or horizontal layout, can be used as a monitor or in any flying systems.
- Arrayable vertically in 4 layers or horizontally in more than 8 columns.



## Model: XR12P

### Technical Specifications

System:	Built-in crossover two way full range active speaker	
Driver Quantity:	12"x1(Bass)	1 xØ44mm Driver
Frequency Response(-3dB):	50Hz-18KHz	
Frequency Response(-10dB):	40Hz-20KHz	
Max Sound Level(dB/1M):	118dB	
Level Adjust range:	±12dB(100Hz)-Bass	±10dB(10KHz)-Treb
Output power:	300W(Bass)+100W(Treb)	
Distortion:	Line-0.02%, Microphone-0.04%	
Rotatable horn(HxV):	50-100°x55°	
Load impedance:	Treb - 8Ohm, Bass - 8 Ohm	
Input impedance:	Line - 20KOhm, Microphone - 10KOhm	
Connectors:	XLR K3P	
Power supply:	AC 115/230V, 50/60Hz	
Dimensions(WxDxH mm/pcs):	415X391X600mm	
Packing Dimensions(WxDxH mm/pcs)	465X435X680mm	
Net Weight(Kg/pcs):	23Kg	
Gross Weight(Kg/pcs):	25.2Kg	

[www.australianmonitor.com.au](http://www.australianmonitor.com.au)

Distributed by Audio Telex Communications Pty Ltd

EUROPE/ASIA/MIDDLE EAST

Phone: 61 2 9647 1411

Email: international@audiotelx.com.au

SYDNEY (NSW & ACT SALES)

Phone: (02) 9647 1411

Email: nsw@audiotelx.com.au

ADELAIDE (SA & NT SALES)

Phone: (08) 8352 4444

Email: sa@audiotelx.com.au

MELBOURNE (VIC & TAS SALES)

Phone: (03) 9890 7477

Email: vic@audiotelx.com.au

PERTH (WA SALES)

Phone: (08) 9228 4222

Email: wa@audiotelx.com.au

BRISBANE (QLD SALES)

Phone: (07) 3852 1312

Email: qld@audiotelx.com.au


AUCKLAND (NZ SALES)

Phone: (09) 415 9426

Email: sales@audiotelx.co.nz

[www.audiotelx.com.au](http://www.audiotelx.com.au)

ABN 78001345482 Incorporated in NSW

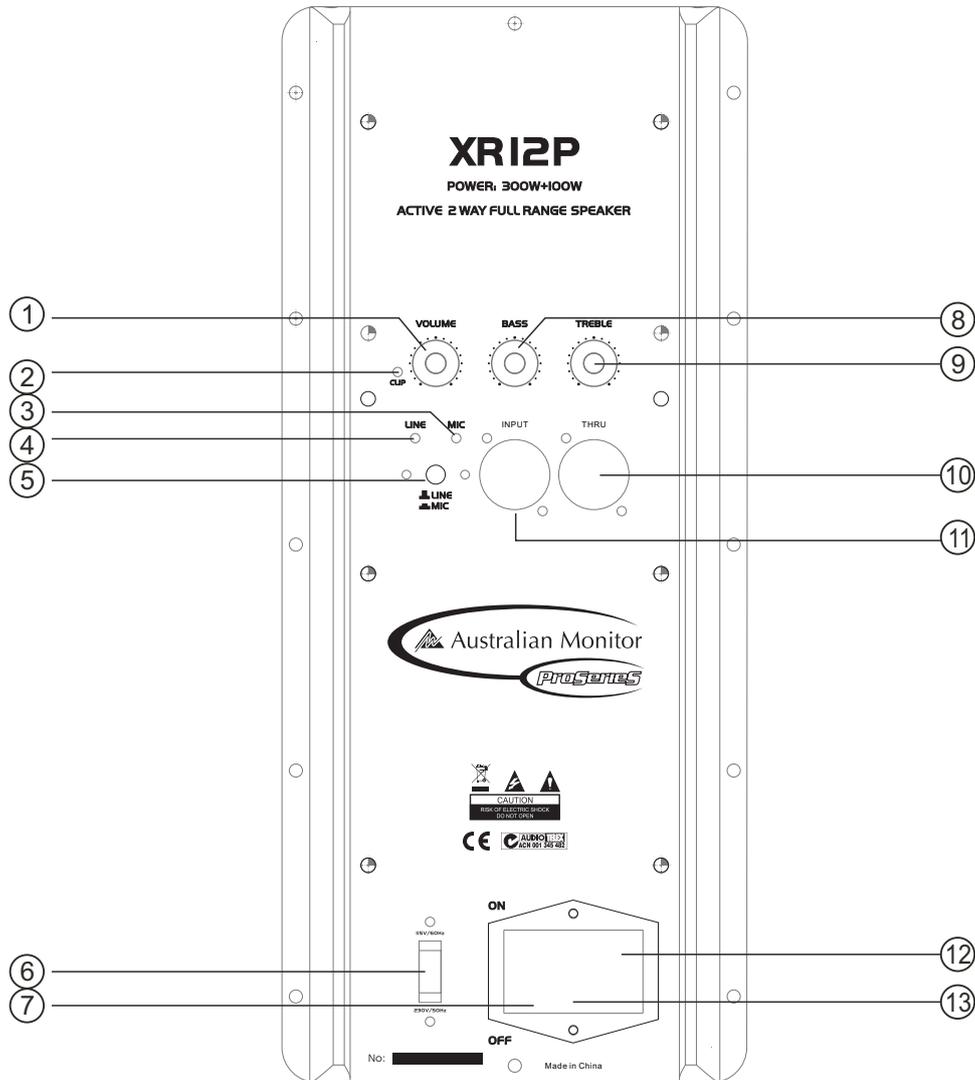

- |  |  |
|--|--|
| <ol style="list-style-type: none"> <li>1. Volume control.</li> <li>2. Clip indicator.</li> <li>3. Microphone input signal presence indicator.</li> <li>4. Line input signal presence indicator.</li> <li>5. Line/microphone selector.</li> <li>6. 115V/230V voltage input selector.<br/>Make sure that the voltage selector is set for your country's correct voltage.</li> <li>7. Power ON/OFF switch.</li> </ol> | <ol style="list-style-type: none"> <li>8. Bass control.</li> <li>9. Treble control.</li> <li>10. Line/microphone output.<br/>(Direct connection to input)</li> <li>11. Line/microphone input.</li> <li>12. Power supply input. Make sure that the voltage selector is set for your country's correct voltage.</li> <li>13. Protection fuse. Use only fuses of a 5 Amp rating.</li> </ol> |
|--|--|