

Features:

- Two-way passive speaker with one 6.5" woofer and one 1" driver.
- Highly durable poly propylene injection molded cabinet.
- Voice coil in the 6.5" woofer is made from \varnothing 50mm copper cladding aluminium ribbon wire.
- Heavy duty protective grille.
- High frequency driver protection.
- Supplied in pairs complete with brackets.
- Available in black or white.



Model: XR6

Technical Specifications

System:	Two Way Full Range Speaker With Built-in Crossover	
Drivers:	6.5" x 1	1x \varnothing 25mm Driver

Frequency Response(-3dB):	80Hz-18KHz
Frequency Response(-10dB):	65Hz-20KHz
Sensitivity(dB/1M/1W):	91 dB

Impedance:	8 Ohm
Recommendatory Power(RMS/W):	80 W
Max Sound Level(dB/1M):	110dB
Dispersion(HxV):	90 ⁰ x60 ⁰

Harmonic Distortion:	≤ 1%
Connectors:	1xNL4
Dimensions(WxDxH mm/pcs):	225X211X325mm
Packing Dimensions(WxDxH mm/pair):	480X255X380mm
Net Weight(Kg/pcs):	5.6Kg
Gross Weight(Kg/pair):	13.2Kg

www.audiotelx.com.au

Distributed by Audio Telex Communications Pty Ltd

SYDNEY (NSW & ACT SALES)

Phone: (03) 9890 7477

Email: nsw@audiotelx.com.au

MELBOURNE (VIC & TAS SALES)

Phone: (02) 9647 1411

Email: vic@audiotelx.com.au

BRISBANE (QLD SALES)

Phone: (07) 3852 1312

Email: qld@audiotelx.com.au

ADELAIDE (SA & NT SALES)

Phone: (08) 8352 4444

Email: sa@audiotelx.com.au

PERTH (WA SALES)

Phone: (08) 9228 4222


Email: wa@audiotelx.com.au

AUCKLAND (NZ SALES)


Phone: (09) 415 9426

Email: audiotlx@nznet.gen.nz


ABN 78001345482 Incorporated in NSW

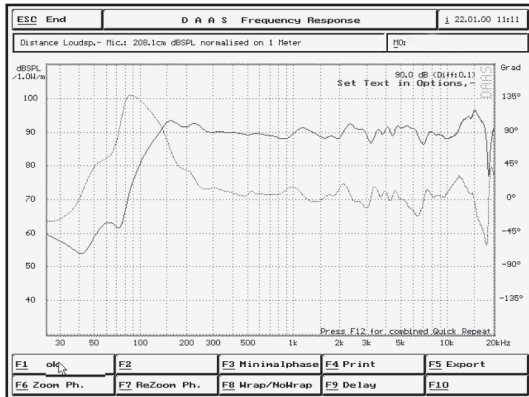


Frequency response, SPL/2.83v

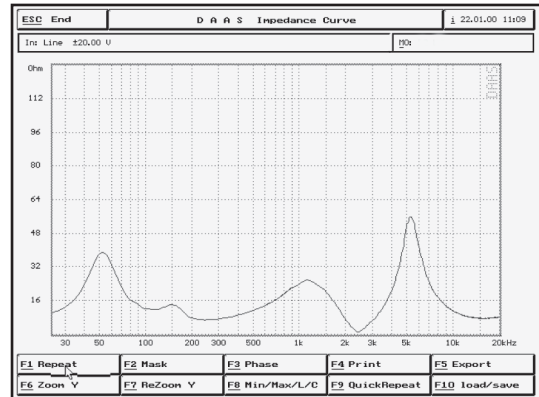



Impedance curve

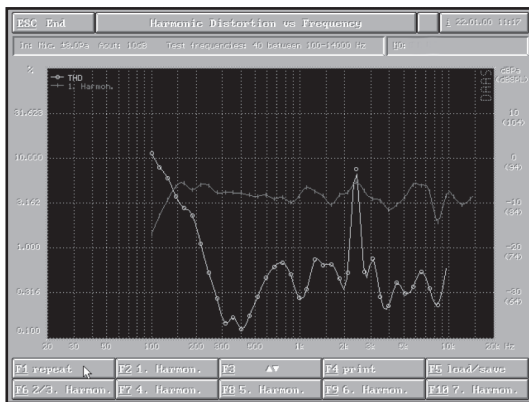


Harmonic distortion 106dB/2.5m, nominal impedance

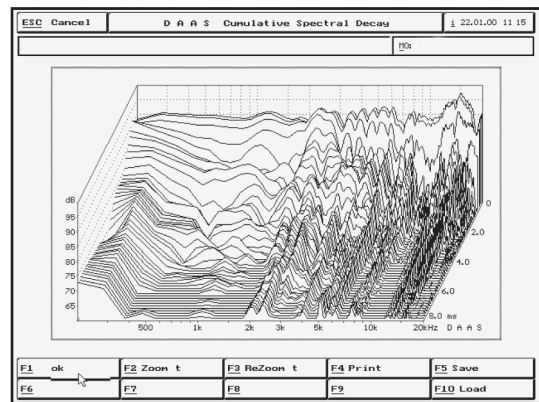

Waterfall spectrum analysis

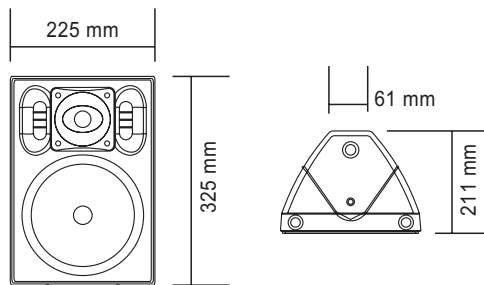

Two Way Crossover

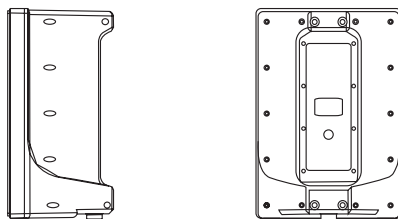

Accessories: **XR6**

- XR6 PMA Pole Mount Adapter
- XR6 UMB Universal Mounting Bracket