



INSTALLATION AND OPERATION MANUAL

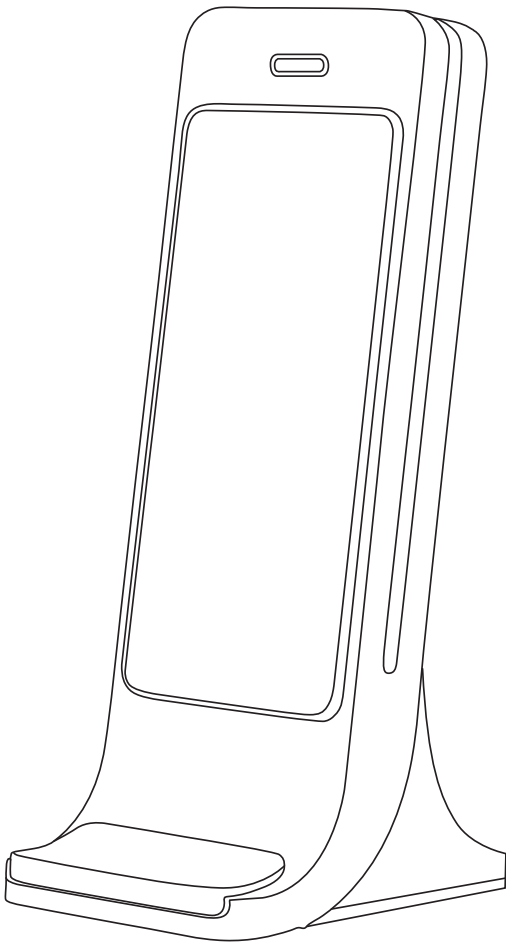

ICON-1

Bringing striking ergonomic design to a new entry level paging market the Icon paging microphone has a microphone level output and logic output for triggering pre-announce tones.



Pin 1	Green/White	Audio +
Pin 2	Green	Audio -
Pin 3	Orange/White	N/C
Pin 4	Blue	N/C
Pin 5	Blue/White	N/C
Pin 6	Orange	PTT Gnd
Pin 7	Brown/white	Audio Gnd
Pin 8	Brown	PTT Logic Out

When the PTT (Push to Talk) button is engaged pins 6 and 8 will be shorted together. This can be used to trigger tones from a tone module or to mute a system.

SPECIFICATIONS

MICROPHONE TYPE	Electret Noise-Cancelling
FREQUENCY RESPONSE	100Hz-12KHz
OUTPUT TYPE	Electronically Balanced, 100ohms impedance
PHANTOM POWER SUPPLY	15V - 48V assuming 7mA of phantom power current per pin
SENSITIVITY	-54dBV/Pa
PTT OUTPUT LOGIC	GND when active, +5V when inactive
CABLE TYPE	3 Meter, RJ45 to 3 Pin XLR

ENGINEERED BY AUSTRALIAN MONITOR

Address: 1 Clyde Street, Silverwater, Sydney NSW 2128 Australia. Private Bag 149, Silverwater NSW 1811 ABN 78 001 345 482

Website: www.australianmonitor.com.au International enquiries email: international@australianmonitor.com.au

DISTRIBUTED IN AUSTRALIA AND NEW ZEALAND BY HILLS SVL www.hillssvl.com.au

NSW P: 02 9647 1411 QLD P: 07 3852 1312 ACT P: 02 6260 4544 WA P: 08 9204 0200 VIC P: 03 9890 7477 SA P: 08 8408 8300 NZ P: 09 415 9426
E: nsw@hillssvl.com.au E: qld@hillssvl.com.au E: act@hillssvl.com.au E: wa@hillssvl.com.au E: vic@hillssvl.com.au E: sa@hillssvl.com.au E: sales@hillssvl.co.nz