

Program Source Series

My Music

The My Music range of program sources are a compact 1 RU series of MP3 compatible CD players and programmable AM/FM tuners. All models feature discrete stereo outputs for each module as well as Infra red remote control and RS232 control. There are 3 models in the range: MYMTCD dual AM/FM tuner, the MYMDCC dual CD player with each module featuring USB input as well as SD card input.

The MYMTCD features a tuner, CD module and includes a priority stereo output. The MYM series can now offer full integration with third party control systems via the RS232 control port.



MYMTCD Tuner/CD



MYMDT Dual tuner



MYMDCC Dual CD


Features

- 1 RU dual program source
- MP3 compatible CD player
- IR control
- RS232 Control
- USB & SD card input on CD player
- Up to 20 tracks programmable on the CD player
- 10 user selectable presets on the AM/FM tuner
- Discrete stereo outputs for each module
- Priority stereo output for the MYMTCD

MYMTCD – Tuner/CD

MYMDT – Dual tuner

MYMDCC – Dual CD

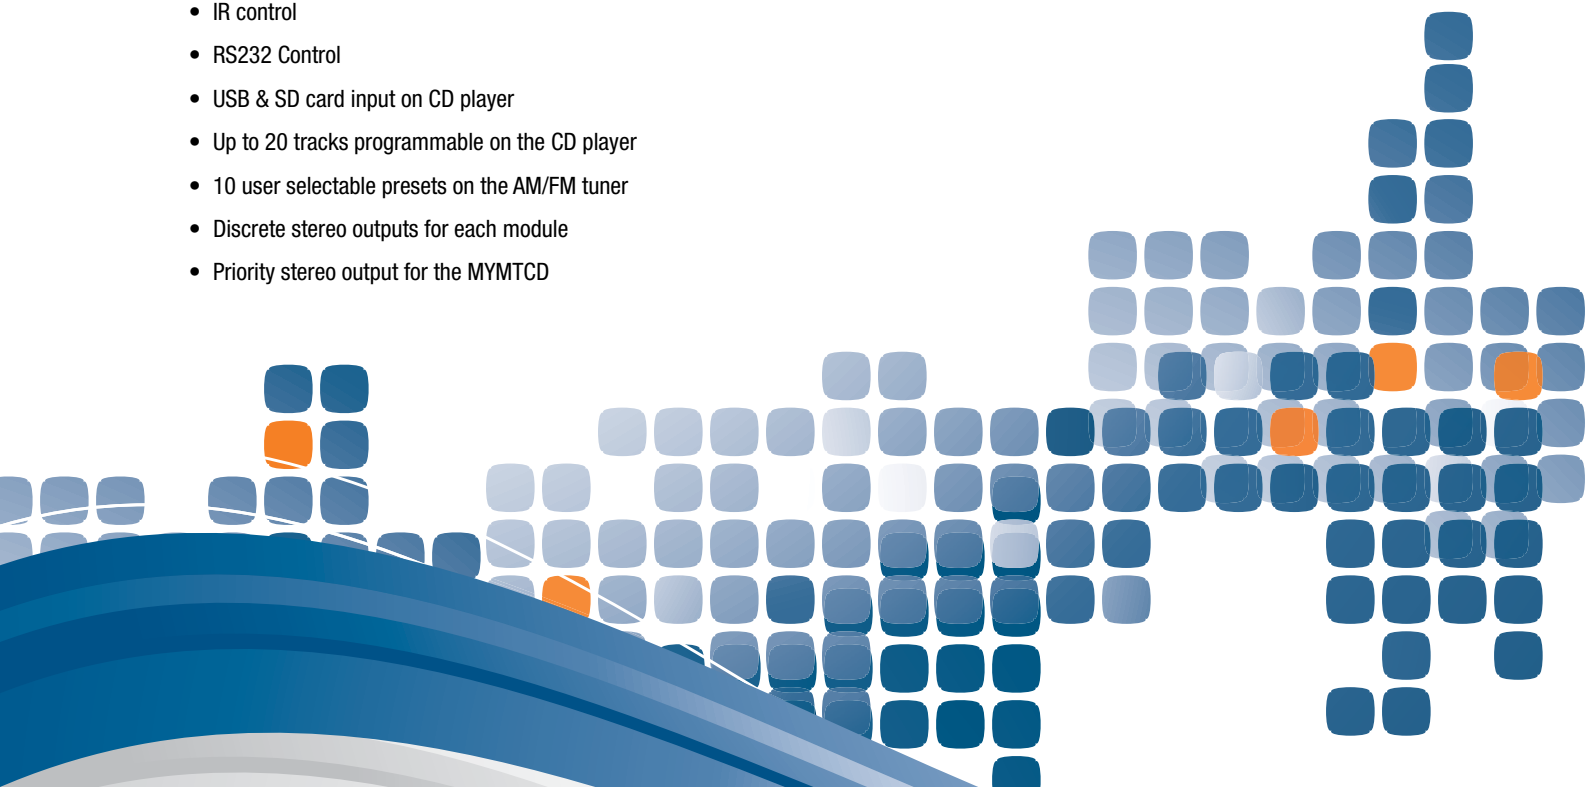

Specifications

The background music source shall be a standard 1RU 19" rack size and comprise an MP3 compatible CD player with USB & SD card input, AM/FM tuner, dual MP3 compatible CD players with USB & SD card inputs, or dual AM/FM tuners. Each program source will have a dedicated stereo output as well as a stereo priority output where source two will have priority over source one on the Tuner/CD combination model. The CD player shall be programmable up to 20 tracks and shall have infrared control and serial control via RS232 available. The tuner shall accept up to 10 user selectable presets. The unit shall be an Australian Monitor MYMTCD / MYMDT / MYMDCD



MYMTCD Rear Panel



MYMDT with RS232 control will be available late 2010 MYMDT Rear Panel



MYMDCD Rear Panel

MYMTCD – Tuner/CD MYMDT – Dual tuner MYMDCD – Dual CD

Output Level @ 1kHz, 0dB	1.2V +/- 0.3V
Frequency Response	20Hz-20kHz +/- 2dB
Separation 1kHz, 0dB	>60 dB
T.H.D+ Noise 1kHz, 0dB	<0.05%
S /N Ratio	>80 dB
SPEC. OF AM / FM TUNER	
FM:	
Tuning Range	87.5 MHz -108 MHz
IF Frequency & Rejection	10.7 MHz >80 dB
Image Rejection	>25 dB
S/N Ratio 1mV/M Input	46db
T.H.D 1mV	<1.0%
Auto Tuning Sens.	<50uV
AM:	
Tuning Range	522kHz – 1620kHz
IF Frequency & Rejection	450 kHz >45dB
Image Rejection	>30dB
S/N Ratio 5mV/M Input	>35dB
Auto Tuning Sens.	<2mV
Dimensions (H x W x D)	482 (W) x 44 (H) x 250 (D) mm
Weight	5kg
Shipping Dimensions (H x W x D)	530 (W) x 37 (H) x 120 (D) mm

ENGINEERED BY AUSTRALIAN MONITOR

Address: 1 Clyde Street, Silverwater, Sydney NSW 2128 Australia. Private Bag 149, Silverwater NSW 1811 ABN 35 007 573 417

Website: www.australianmonitor.com.au International enquiries email: international@australianmonitor.com.au

DISTRIBUTED IN AUSTRALIA AND NEW ZEALAND BY HILLS SVL www.hillssvl.com.au

NSW P: 02 9647 1411 QLD P: 07 3852 1312 ACT P: 02 6260 4544 WA P: 08 9204 0200 VIC P: 03 9890 7477 SA P: 08 8408 8300 NZ P: 09 415 9426
E: nsw@hillssvl.com.au E: qld@hillssvl.com.au E: act@hillssvl.com.au E: wa@hillssvl.com.au E: vic@hillssvl.com.au E: sa@hillssvl.com.au E: sales@hillssvl.co.nz

