


# Installation Series

## Rapid Fit RF4

The Australian Monitor Installation Series Rapid Fit 4 is a low cost and discreet ceiling speaker. The Rapid Fit 4 features a low cost plastic grill of stylish design and a 4 inch 100 volt speaker with 5, 2.5, 1, 0.5 & 0.33 watt tapings.

The Rapid fit 4 offers a very cost effective & architecturally pleasing ceiling speaker package. The Rapid Fit 4 also saves on installation costs as it is extremely quick & simple to install via its two pre-tensioned spring clip mounting system.

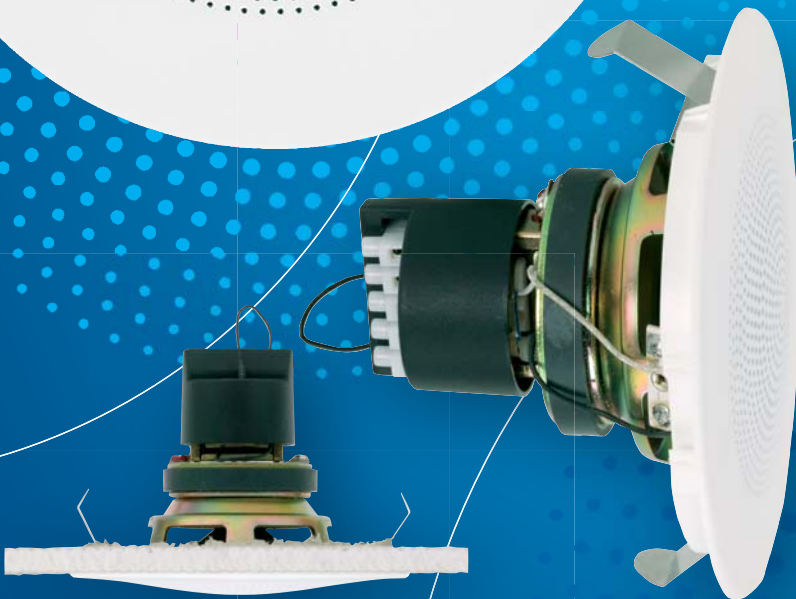

## Architecture & Engineering Specifications



The Speaker shall be 100mm, 100 volt line type with trappings at 5w, 2.5w, 1w, 0.5w, 0.3w and shall come complete with plastic grill assembly and pre tension metal clips. The speaker shall be the Australian Monitor Installation Series Rapid Fit 4.

### Specifications - Rapid Fit 4 Speaker & Ceiling Grill Assembly

Driver Wattage:	10W
Driver Impedance:	8 Ohms
100 Volt Line Power Tappings:	5w / 2.5w / 1w / 0.5w / 0.33W
100 Volt Line Impedence:	2k / 4k / 10k / 20k / 30.3k
Sound Pressure Level @ 1w/1m:	92dB
Frequency Response @ -6dB:	75Hz - 20kHz
Directivity @ 2kHz:	150 degrees
Cut Out:	133mm
O/D:	153mm
Depth:	103mm

The Rapid Fit 4 grill & clips are also available as a spare part for use with other 4" drivers;


RF4G  
RFCLIP

Rapid Fit 4" Grill  
Clips for the RF4G


### Model: RF4 (With Grille)

#### 4 Inch Speaker with Line Transformer Specifications

Driver Wattage:	10W
Driver Impedance:	8 OHM
100 Volt Line Power Tapping:	5w / 2.5w / 1w / 0.5w / 0.33W
100 Volt Line Impedence:	2k / 4k / 10k / 20k / 30.3k
Sound Pressure Level @ 1kHz, 1w:	87dB
Frequency Range @ -6dB:	75 - 20kHz
Directivity @ 2kHz:	150 degrees

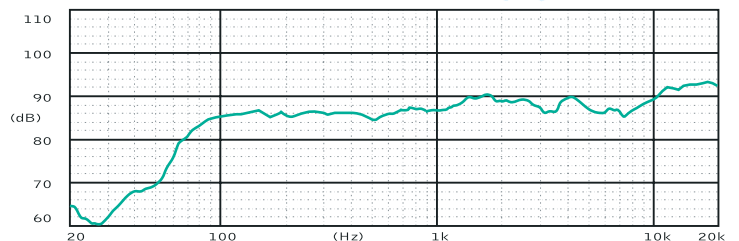

Frequency Response

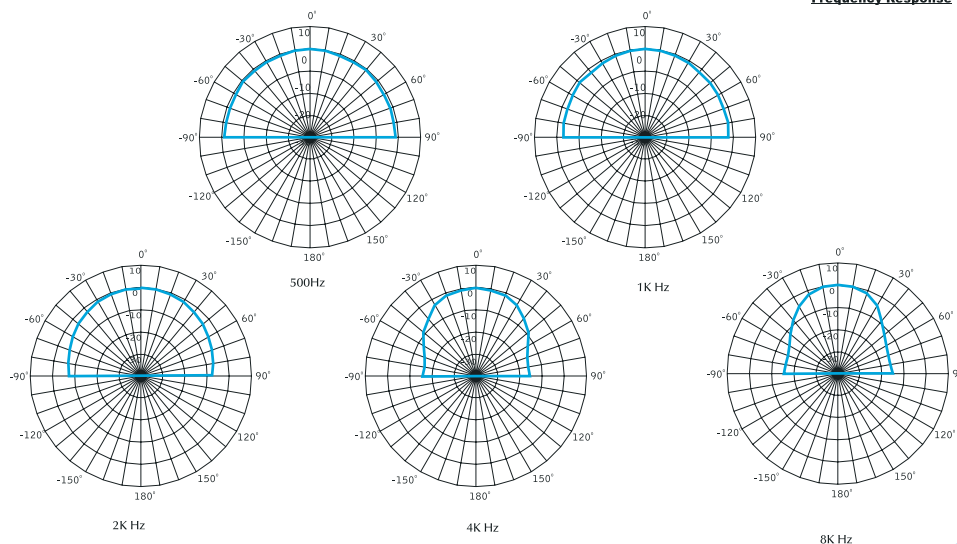

Polar Pattern