

Australian Monitor

Café Series Speakers



CAFÉ SERIES

Cafe Series Speakers

The Australian Monitor Cafe20 is a small but extremely high quality die-cast aluminium, two way speaker. Featuring a 3" woofer and a ½" tweeter, the Cafe20 delivers extremely high quality audio from a small, robust enclosure. The Cafe20 is rated at 30 Watts (RMS) and offers an elegantly styled and great sounding speaker for applications where architectural and aesthetic considerations are paramount. Available in black or white and supplied in pairs with mounting brackets.



Cafe Series Powered Sub Woofer

The Australian Monitor Cafe80P is the perfect partner for the Cafe20 speakers. A dual 6.5" band pass sub that is both compact and punchy, the Cafe80P boasts an on-board 80 Watt D Class power amplifier and four 25 Watt amplifiers to power the Cafe20's. The Cafe80P is available in either black or white and features stereo RCA inputs, stereo XLR inputs and thru outputs, stereo/mono mode switching for the satellite amplifiers, individual level controls for each satellite amplifier and a master volume control.

The Cafe80P can also act as a complete small system controller with the addition of the CafeWMVC wall mount volume control. This allows for remote wall mounted master volume, treble and bass control, all mounted on a Clipsal 2000 wall plate and connected via CAT5 cable. The CafeWMVC is available in white.



Cafe Series Pack

The Australian Monitor Cafe20 Cafe80P series is also available as the Cafe Pack, complete with four Cafe20 speakers, one Cafe80P sub, one CafeWMVC wall panel and four 15m speaker cables, all in one convenient package.



Available in black or white



Specifications


Cafe20

Woofer	Diameter	75mm
Tweeter	Diameter	25mm
Impedance		8 ohm
Power	RMS	30W
	Program	60W
	Peak	120W
Sensitivity (1W/1m)		84dB
Frequency Response (+/-3dB)		140Hz-30kHz
Dispersion (H x V)		120° x 90°
Dimensions (H x W x D)		150mm x 90mm x 110mm
Shipping Dimensions (pair) (H x W x D)		190mm x 360mm x 137mm
Shipping Weight		4.7kg



Cafe80P

Woofer	Diameter	160mm
Power	RMS	40W
	Program	80W
	Peak	160W
Sensitivity (1W/1m)		90dB
Frequency Response (± 3 dB)		39Hz-190Hz
Sub Power Output	4 ohms, 1% THD, RMS	70W
Satellite Power Output	8 ohms, 1% THD, RMS	15W
	4 ohms, 1% THD, RMS	25W
	2 ohms, 1% THD, RMS	Not Recommended
Sub Bandpass		40Hz-175Hz
Satellite Bandpass		80Hz-30kHz
Input Sensitivity		85mV
Current Draw		1.2A max
Fuse Rating		250V, 2A, SB
Dimensions (H x W x D)		405mm x 270mm x 345mm
Shipping Dimensions (H x W x D)		500mm x 410mm x 360mm
Shipping Weight		15.7kg

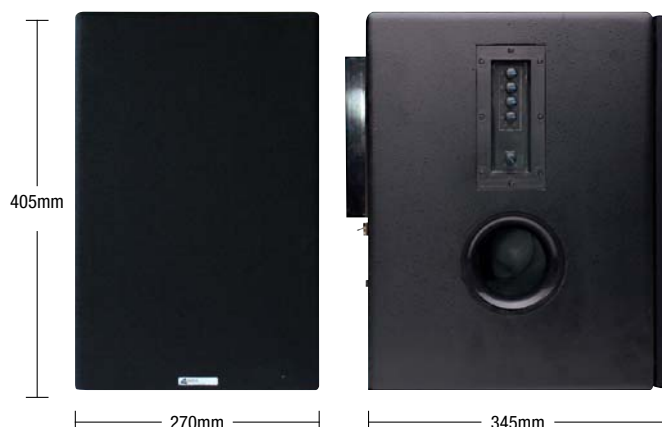


Cafe Pack

Shipping Dimensions (H x W x D)	520mm x 590mm x 390mm
Shipping Weight	24.2kg

WMVC

EQ Controls	Bass	100Hz ± 10 dB
	Treble	10kHz, ± 10 dB
Maximum Cabling Distance		50m
Dimensions (H x W x D)		115mm x 75mm x 44mm
Shipping Dimensions (H x W x D)		80mm x 130mm x 85mm
Shipping Weight		0.2kg

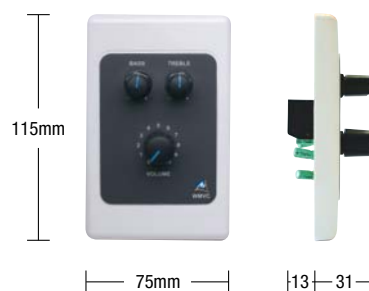

ENGINEERED BY AUSTRALIAN MONITOR

Address: 1 Clyde Street, Silverwater, Sydney NSW 2128 Australia. Private Bag 149, Silverwater NSW 1811 ABN 35 007 573 417

Website: www.australianmonitor.com.au International enquiries email: international@australianmonitor.com.au

DISTRIBUTED IN AUSTRALIA AND NEW ZEALAND BY HILLS SVL www.hillssvl.com.au

NSW P: 02 9647 1411 QLD P: 07 3852 1312 ACT P: 02 6260 4544 WA P: 08 9204 0200 VIC P: 03 9890 7477 SA P: 08 8408 8300 NZ P: 09 415 9426
E: nsw@hillssvl.com.au E: qld@hillssvl.com.au E: act@hillssvl.com.au E: wa@hillssvl.com.au E: vic@hillssvl.com.au E: sa@hillssvl.com.au E: sales@hillssvl.co.nz

